

RD45Q.1.S系列 - 桥式两侧可打开

Series of RD45Q.1.S - Bridge type open of both side



闭合状态：
Opening type:

- Q** 桥式
Bridge type
- F** 全封闭式
Enclosed
- BF** 半封闭式
Semi-enclosed

注：无字母为普通型
Note: blank means general type

打开方式：
Opening way:


- B** 不可打开
Non-opening
- S** 双侧打开
Open of both side
- W** 外侧打开
Exterior opening
- N** 内侧打开
Interior opening
- F** 无需打开
Without opening

款式：
Style:

- Q.B** 桥式不可打开
Bridge type non-opening
- Q.N** 桥式内侧开
Bridge type interior opening
- Q.W** 桥式外侧开
Bridge type exterior opening
- Q.S** 桥式双侧可打开
Bridge type both side opening
- BF.B** 半封闭不可开
Semi-enclosed non-opening
- BF.N** 半封闭内侧开
Semi-enclosed interior opening
- BF.W** 半封闭外侧开
Semi-enclosed exterior opening
- BF.S** 半封闭双侧开
Semi-enclosed both side opening
- F.N** 封闭内侧开
Enclosed interior opening
- F.W** 封闭外侧开
Enclosed exterior opening
- F.S** 封闭双侧开
Enclosed both side opening


接头类型：
Bracket type:

- X** 斜型接头
Oblique bracket
- F** 方型接头
Square bracket

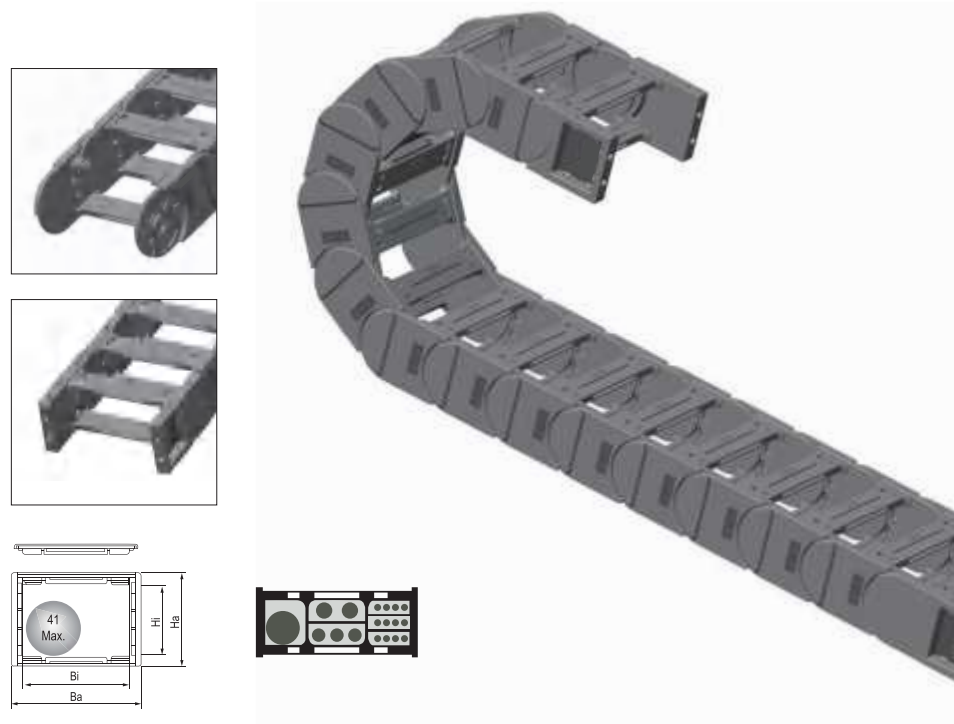

- ◎ The cable chain tested service life is up to 20 million times.
- ◎ The ledge of cable chain is able to open to inspect or replace cable.
- ◎ The cable chain can be mounted separator and cross separator to divide space and effectively protect cables. (See accessories table)
- ◎ The cable chain can be mounted pectinate plate to fix cable better. (See accessories table)
- ◎ The cable chain is suitable for a diameter of 41mm or less of cable.
- ◎ 测试使用寿命达 2 千万次
- ◎ 可将拖链内外侧挡片打开，方便检查或更换线缆
- ◎ 可装竖隔片、横隔片区分空间，更有效保护线缆（见选配区）
- ◎ 可配梳状板，更好的固定线缆（见选配区）
- ◎ 适用于直径 41 毫米以下线缆


主要技术参数 Basic technical data

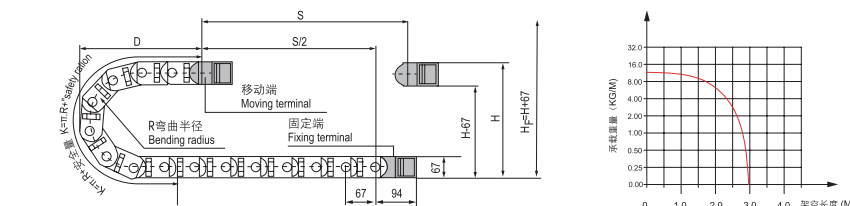

R	100	125	150	175	200	225	250	300
H	267	317	367	417	467	517	567	667
D	201	226	251	275	301	326	351	401
K	469	536	670	737	804	871	938	1139

安装实际高度: $H_1 = H + 67\text{mm}$ (负载 2.2kg/m)
Actual mounting height: $H_1 = H + 67\text{mm}$ (load 2.2kg/m)


RD45Q.1.S系列 - 桥式两侧可打开 Series of RD45Q.1.S-Bridge type open of both side

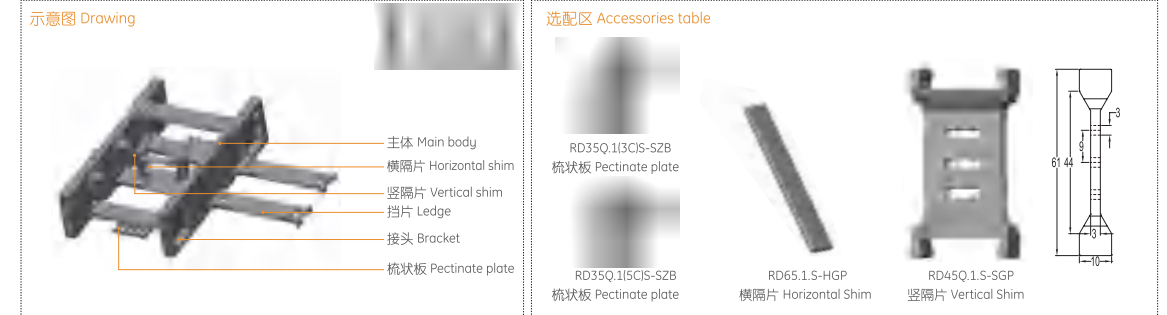

系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters										代号 No.
							可配接头类型 Applicable bracket type	孔径 Bore diameter $\phi 1$	孔距 (mm) hole distance								
RD45Q.1.50S	45	50	67	74	Q.S	100,125,150, 175,200,225, 250,300	F-Q	6	24	65	94	26	15	80	RD45Q.1.50S-FJT		
RD45Q.1.60S	45	60	67	84	Q.S		F-Q	6	24	75	94	26	15	90	RD45Q.1.60S-FJT		
RD45Q.1.75S	45	75	67	99	Q.S		F-Q	6	24	90	94	26	15	105	RD45Q.1.75S-FJT		
RD45Q.1.90S	45	90	67	114	Q.S		F-Q	6	24	105	94	26	15	120	RD45Q.1.90S-FJT		
RD45Q.1.100S	45	100	67	124	Q.S		F-Q	6	24	115	94	26	15	130	RD45Q.1.100S-FJT		
RD45Q.1.117S	45	117	67	141	Q.S		F-Q	6	24	132	94	26	15	147	RD45Q.1.117S-FJT		
RD45Q.1.125S	45	125	67	149	Q.S		F-Q	6	24	140	94	26	15	155	RD45Q.1.125S-FJT		
RD45Q.1.130S	45	130	67	154	Q.S		F-Q	6	24	145	94	26	15	160	RD45Q.1.130S-FJT		
RD45Q.1.150S	45	150	67	174	Q.S		F-Q	6	24	165	94	26	15	180	RD45Q.1.150S-FJT		
RD45Q.1.154S	45	154	67	178	Q.S		F-Q	6	24	169	94	26	15	184	RD45Q.1.154S-FJT		
RD45Q.1.175S	45	175	67	199	Q.S		F-Q	6	24	190	94	26	15	205	RD45Q.1.175S-FJT		
RD45Q.1.200S	45	200	67	224	Q.S		F-Q	6	24	215	94	26	15	230	RD45Q.1.200S-FJT		
RD45Q.1.250S	45	250	67	274	Q.S		F-Q	6	24	265	94	26	15	280	RD45Q.1.250S-FJT		
RD45Q.1.300S	45	300	67	324	Q.S	F-Q	6	24	315	94	26	15	330	RD45Q.1.300S-FJT			

注：S 表示两侧可打开
Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表 See table)

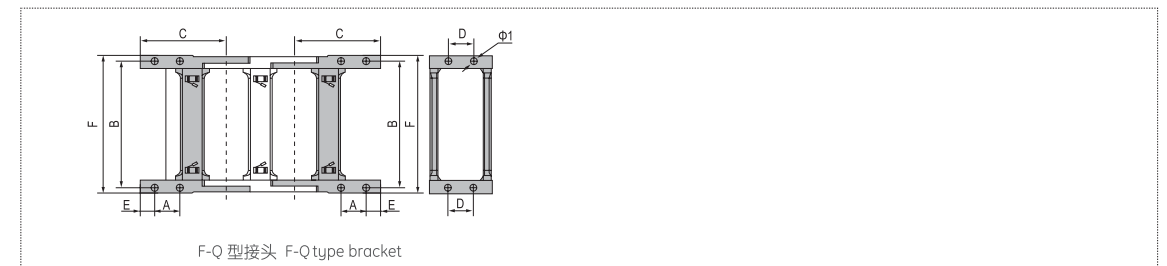

订货示例 Order Sample

示例 拖链内高 45mm、内宽 50mm、半径 100mm、长度 1 米 /15 节 (Sample: inner height 45mm, inner width 50mm, radius 100mm, length 15 links/1 meter)

拖链 Chain RD45Q.1.50S R100 1000mm/15 Links
接头 Bracket RD45Q.1.50S-XJT 副 (Set)
配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注：可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.